

**NEW  
PRODUCT**



## **MULTI COLLECT 125**

### **UNIVERSAL CURRENT COLLECTOR FOR CRANES**

#### **VARIABLE**

- Connection possibility for different cable diameters
- Connection via standard cables – no highly flexible connection cables necessary
- Connection box detachable
- Single or double connection cable

#### **QUICK AND EASY**


- Simple installation
- Visual control of installation dimensions
- Automatic adjustment of the phase distance

# MULTI COLLECT 125

High-quality spherical plain bearings for permanent load change

Square mount with integrated phase and spacing adjustment

Automatic entering for Funnel entrances

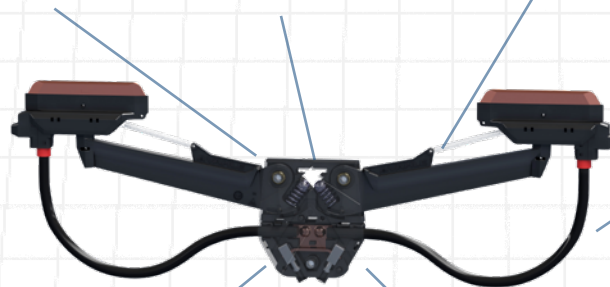

Exactly predefined, highly flexible cable routing

Integrated power distribution to both carbon brushes

Connection box can be easily removed



Visual adjustment & system control

Compatible with U15 & U25



## TECHNICAL DATA

- Type specification: KDST125
- Possible deflection:  $\pm 40 \text{ mm}$   $\updownarrow \leftrightarrow$
- Travel speed: bis zu 600 m/min
- Max. current: 63 Ampere pro Schleifkohle
- Connection cable: 2,5 - 10 mm<sup>2</sup>
- Contact protection according to IP2X
- PE unmistakable
- Funnel capable